


# GT-4 SETUP SHEET

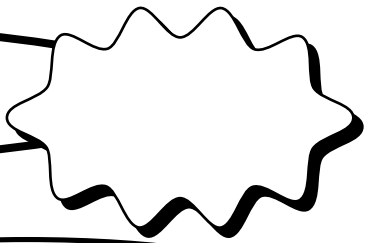

Date: \_\_\_\_\_  
Name: \_\_\_\_\_

Track: \_\_\_\_\_

Fastest lap: \_\_\_\_\_


Revised 9.20.01

## Front Suspension

Plastic [Shock body type]  Alum

Length \_\_\_\_\_ mm  
Preload \_\_\_\_\_ mm  
Spring \_\_\_\_\_  
Shock oil # \_\_\_\_\_  
Piston # \_\_\_\_\_  
Shock position

Caster [Shims behind upper arm]  
Thick (2.6mm) \_\_\_\_\_  
Thin (1.3mm) \_\_\_\_\_

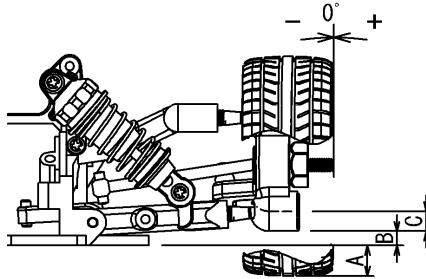

Width \_\_\_\_\_ mm  
Camber \_\_\_\_\_ °  
Ride height \_\_\_\_\_ mm  
Downstop \_\_\_\_\_ mm  
Bumpstop \_\_\_\_\_ mm  
Toe angle \_\_\_\_\_ °


Front anti-roll bar  
 None  \_\_\_\_\_ °

Front one-way differential   
Gear diff  Diff grease \_\_\_\_\_

## Rear Suspension

Plastic [Shock body type]  Alum

Length \_\_\_\_\_ mm  
Preload \_\_\_\_\_ mm  
Spring \_\_\_\_\_  
Shock oil # \_\_\_\_\_  
Piston # \_\_\_\_\_  
Shock position

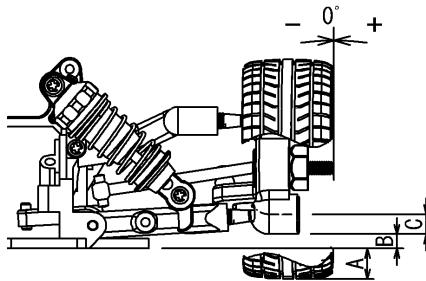

Width \_\_\_\_\_ mm  
Camber \_\_\_\_\_ °  
Ride height \_\_\_\_\_ mm  
Downstop \_\_\_\_\_ mm  
Bumpstop \_\_\_\_\_ mm  
Toe angle \_\_\_\_\_ °


Rear anti-roll bar  
 None  \_\_\_\_\_ mm

Solid rear axle   
Gear diff  Diff grease \_\_\_\_\_

190mm rear setup (short pillow balls & dogbones)  
 200mm rear setup (long pillow balls & dogbones)



	Front		Rear
Tire	_____	Tire	_____
Insert	_____	Insert	_____
Wheel	_____	Wheel	_____



Body

## Engine

Make \_\_\_\_\_ Pipe \_\_\_\_\_ Cooling head \_\_\_\_\_  
Spec \_\_\_\_\_ Manifold \_\_\_\_\_ Head clearance \_\_\_\_\_  
Plug \_\_\_\_\_ Fuel \_\_\_\_\_

## Transmission

Single  2-Speed

1st gear (pinion / spur) \_\_\_\_\_ / \_\_\_\_\_  
2nd gear (pinion / spur) \_\_\_\_\_ / \_\_\_\_\_

## Comments

\_\_\_\_\_